

MixFlo Range

MF100/MF125/MF150/MF200





These powerful in-duct mounted mixed flow fans have been designed to produce higher working pressures for applications that require high air flows, with low relative noise.

Mixflo fans can be mounted in a variety of applications as shown and are suitable for use with either rigid or flexible ducting

- High quality ball bearing, long life motors, continuously rated and warranted for a minimum of 30,000 hours or 3 years.
- High air flows are achieved through flexible duct
- Compact overall dimensions
- 2 speed fan settings for 100mm/4", 125mm/5" and 150mm/6" models and
- 3 speed fan settings for the 200mm/8" model
- Double Insulation - no earth required
- Fully Building Code compliant
- Fully BEAB approved rated to IPX4.
- Easy installation and maintenance with the fan assembly easily removed from rigid ducting installations using the specially designed construction

Dimensions (mm)

	ØA	B*	C	D	E	F	G
MF100	98	180	298	168	100	168	68
MF125	120	180	260	168	100	168	50
MF150	140	220	320	140	120	140	30
MF200	197	244	354	142	140	230	52

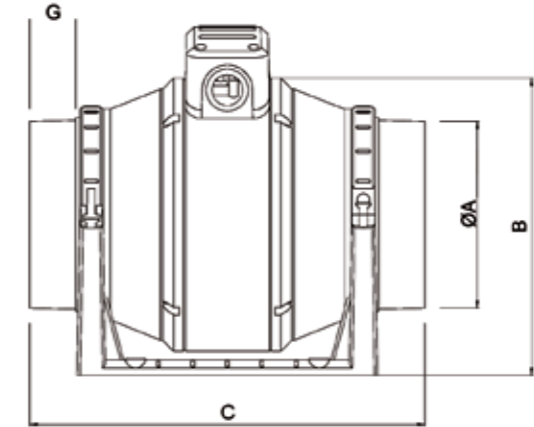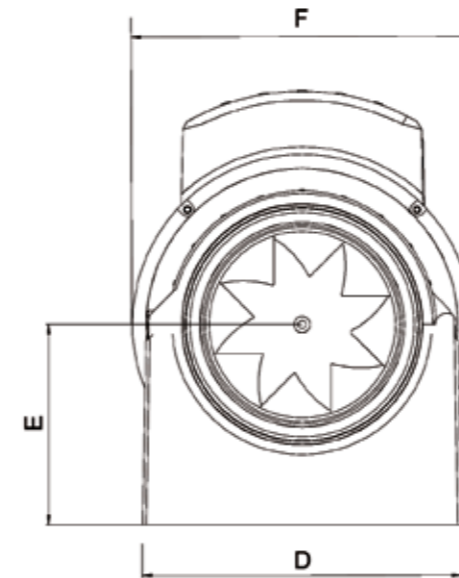

Technical specifications

Catalogue No	Speed	RPM	Wattage	Maximum Airflow (m ³ /hr)	Maximum Airflow (LPS)	Maximum Pressure (PA)	dB(A) 3m*	Max Operating Temp °C
STD / Timer								
MF100S/MF100T	H	2400	25	245	68	200	24	40
	L	1700	20	180	50	120	20	
MF125S/MF125T	H	2400	33	310	86	230	25	40
	L	1700	28	240	67	160	21	
MF150S/MF150T	H	2400	48	500	138	360	35	40
	L	1700	42	400	111	320	31	
MF200	H	2700	120	855	238	313	48	40
	M	2750	113	738	205	280	48	40
	L	2000	110	648	180	260	48	40

*Lp dB(A) 3 metres - sound pressure based on the high speed for each fan

Speed Controller

Cat No. METCON

