

INSTALLATION INSTRUCTIONS FOR THE 7205/7202 DUCTING KIT

Ideal for venting cooker hoods on an external wall.

1. select a suitable position in an external wall for your cooker hood venting outlet. Prepare a 112mm diameter hole through the wall. See diagram 1.
2. Pre form the ducting carefully and extend to its full length, or to the length required, so that it reaches from the top of the cooker hood to the outside wall. Make good around the grille if necessary. Secure the grille over the outlet with the 4 screws and plugs provided.
3. Make good around the inside if necessary and allow to set. Connect the free end of the ducting to the cooker hood discharge spigot (as supplied by manufacturer).

THIS KIT CAN ALSO BE USED FOR A TUMBLE DRIER USING AN ADAPTOR AVAILABLE FROM YOUR APPLIANCE SUPPLIER.


NOTE: Cooker hood exhaust connection diameters can vary slightly and the elbow or threaded hose connector may not make a tight fit. Use of the adhesive pads in the fixing kit will secure either the elbow or threaded connector firmly.

IMPORTANT

The appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.

Precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliances when mounted in outside windows or walls.

Trapped grease vapours in the filter mat in the hood may cause problems, therefore it is advisable to clean it regularly and change your filter. See your extractor hood instructions for details.

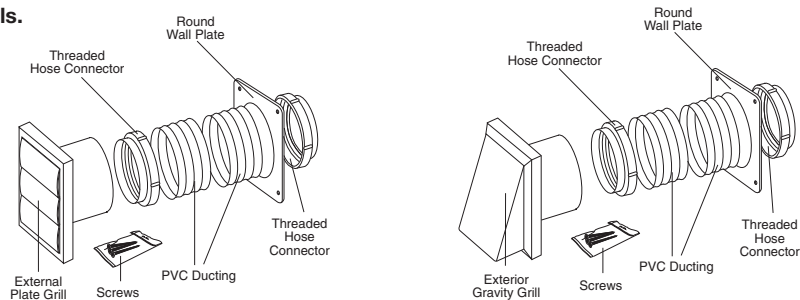

7205 Kit



7202 Kit



INSTALLATION INSTRUCTIONS FOR THE 7205/7202 DUCTING KIT

Ideal for venting cooker hoods on an external wall.

1. select a suitable position in an external wall for your cooker hood venting outlet. Prepare a 112mm diameter hole through the wall. See diagram 1.
2. Pre form the ducting carefully and extend to its full length, or to the length required, so that it reaches from the top of the cooker hood to the outside wall. Make good around the grille if necessary. Secure the grille over the outlet with the 4 screws and plugs provided.
3. Make good around the inside if necessary and allow to set. Connect the free end of the ducting to the cooker hood discharge spigot (as supplied by manufacturer).

THIS KIT CAN ALSO BE USED FOR A TUMBLE DRIER USING AN ADAPTOR AVAILABLE FROM YOUR APPLIANCE SUPPLIER.


NOTE: Cooker hood exhaust connection diameters can vary slightly and the elbow or threaded hose connector may not make a tight fit. Use of the adhesive pads in the fixing kit will secure either the elbow or threaded connector firmly.

IMPORTANT

The appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.

Precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliances when mounted in outside windows or walls.

Trapped grease vapours in the filter mat in the hood may cause problems, therefore it is advisable to clean it regularly and change your filter. See your extractor hood instructions for details.

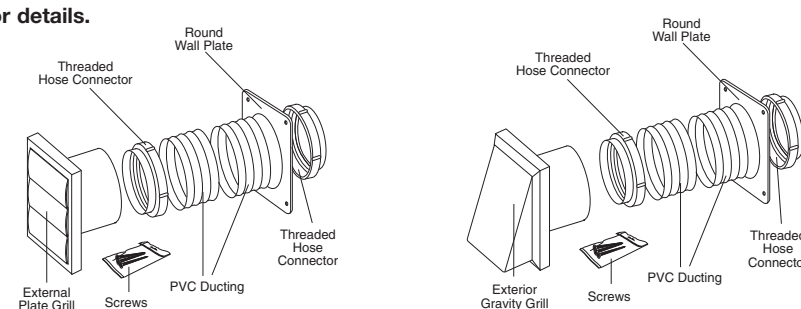

7205 Kit



7202 Kit

