

INSTALLATION INSTRUCTIONS FOR THE 7215/7216 DUCTING KIT

Ideal for cooker hoods which require venting to an outside wall



1. select a suitable position in an external wall for your venting outlet. Prepare a 140mm 5.5" diameter hole through the wall.
2. Extend the ducting to the width of the wall and insert into the wall.
3. Screw one of the threaded hose connectors onto the end of the ducting. Fit the external grille by pushing the spigot onto the ducting. Fix the grille to the outside wall using the screws and wall plugs provided.
4. Pre form the ducting carefully and extend to its full length, or to the length required, so that it reaches from the top of the cooker hood to the outside wall. Make good around the grille if necessary. Fasten the wall plate over the end of the ducting.
5. Make good around the inside if necessary and allow to set. Connect the free end of the ducting to the cooker hood discharge spigot using threaded hose connector (as supplied by manufacturer)

IMPORTANT

The appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.

Precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliances when mounted in outside windows or walls.

Trapped grease vapours in the filter mat in the hood may cause problems, therefore it is advisable to clean it regularly and change your filter. See your extractor hood instructions for details.

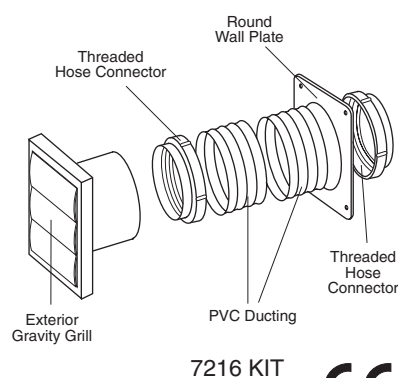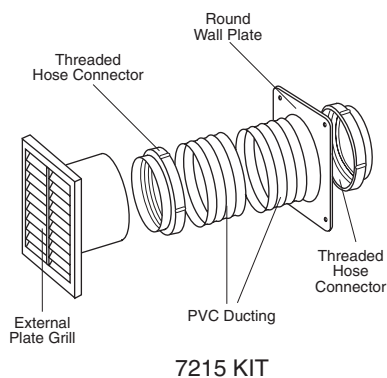

INSTALLATION INSTRUCTIONS FOR THE 7215/7216 DUCTING KIT

Ideal for cooker hoods which require venting to an outside wall

1. select a suitable position in an external wall for your venting outlet. Prepare a 140mm 5.5" diameter hole through the wall.
2. Extend the ducting to the width of the wall and insert into the wall.
3. Screw one of the threaded hose connectors onto the end of the ducting. Fit the external grille by pushing the spigot onto the ducting. Fix the grille to the outside wall using the screws and wall plugs provided.
4. Pre form the ducting carefully and extend to its full length, or to the length required, so that it reaches from the top of the cooker hood to the outside wall. Make good around the grille if necessary. Fasten the wall plate over the end of the ducting.
5. Make good around the inside if necessary and allow to set. Connect the free end of the ducting to the cooker hood discharge spigot using threaded hose connector (as supplied by manufacturer)

IMPORTANT

The appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.

Precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliances when mounted in outside windows or walls.

Trapped grease vapours in the filter mat in the hood may cause problems, therefore it is advisable to clean it regularly and change your filter. See your extractor hood instructions for details.

